


OVERVIEW

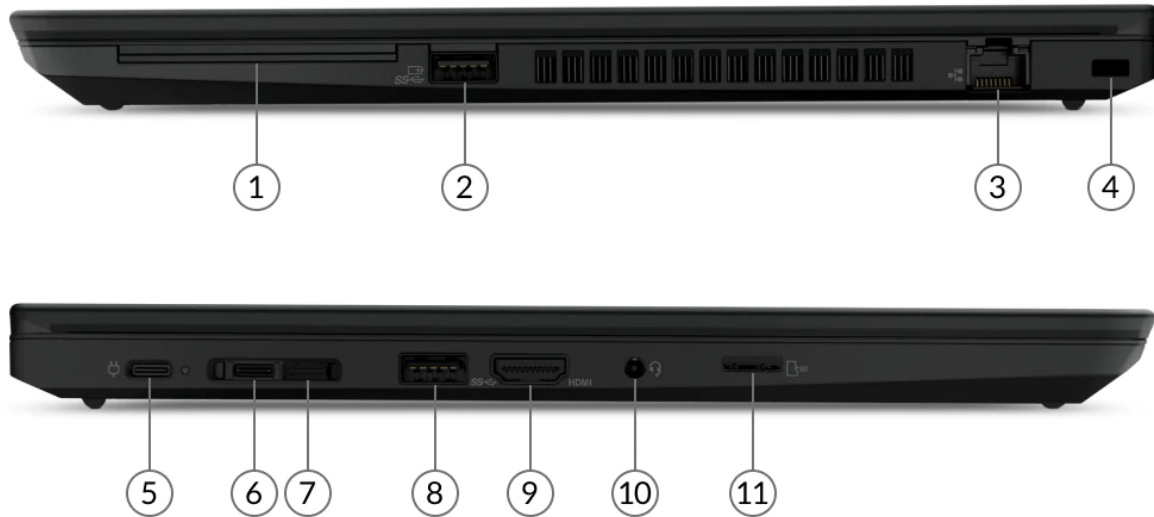

1. Smart card reader *	7. Side docking connector
2. USB 3.2 Gen 1 (Always On)	8. USB 3.2 Gen 1
3. Ethernet (RJ-45)	9. HDMI 2.0
4. Kensington Security Slot	10. Headphone / microphone combo jack (3.5mm)
5. USB-C 3.2 Gen 2	11. microSD card reader
6. USB-C 3.2 Gen 2	

Notes:

- Items with * are only available on selected models
- Optional nano-SIM card slot on the rear side (not shown on the sample product above)
- The combination of 5, 6, and 7 is side docking connector

PERFORMANCE

Processor

Processor Family

AMD Ryzen™ 5 / 7 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
AMD Ryzen 5 PRO 5650U	6	12	2.3GHz	4.2GHz	3MB L2 / 16MB L3	AMD Radeon™ Graphics
AMD Ryzen 7 PRO 5850U	8	16	1.9GHz	4.4GHz	4MB L2 / 16MB L3	AMD Radeon Graphics

Operating System

Operating System**^[1]

- Windows® 11 Pro
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 DG Windows 10 Pro 64
- Windows 10 Pro 64
- Windows 10 Home 64
- Windows 10 Home 64 Single Language
- Fedora Linux
- Ubuntu Linux LTS
- No operating system

Notes:

1. Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

Graphics

Graphics

Graphics	Type	Memory	Connector	Max Resolution	Key Features	Remark
AMD Radeon Graphics	Integrated	Shared	-	-	DirectX® 12	-

Monitor Support

Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and USB-C®)

- HDMI supports up to 4096x2160@60Hz
- USB-C supports up to 5120x2880@60Hz, DP mode via USB-C to DP dongle

Chipset

Chipset

AMD SoC (System on Chip) platform

Memory

Max Memory^[1]

Up to 48GB (16GB soldered + 32GB SO-DIMM) DDR4-3200

Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

Memory Type

DDR4-3200 non-ECC

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

ThinkPad P14s Gen 2 (AMD)

One drive, up to 2TB M.2 2280 SSD

Storage Slot

One M.2 2280 PCIe® 3.0 x4 slot

Storage Type**[2]

Disk Type	Interface	RPM	Offering	Security
M.2 2242 SSD	PCIe NVMe®, PCIe 3.0 x4	-	-	-
M.2 2280 SSD	PCIe NVMe, PCIe x4	-	-	Opal 2.0
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4 Performance	-	-	Opal 2.0

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
2. PCIe x4 SSD may be PCIe 3.0 x4 or PCIe 4.0 x4 as substitution.

Removable Storage

Card Reader

microSD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby® Audio™

Microphone

- Dual-microphone array, near-field
- No microphone

Camera**

- HD 720p, with privacy shutter, fixed focus
- HD 720p + IR hybrid, with privacy shutter, fixed focus
- No camera

Battery

Battery

Integrated Li-Polymer 50Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Max Battery Life^[1]

MobileMark® 2018: 12.5 hr

JEITA 2.0: 15.8 hr (idle, 150 nits)

Notes:

1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter**[1][2]

- 45W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter

Notes:

1. AC adapter offerings depend on the country.

2. No power adapter is for special bid only.

DESIGN

Display

Display**^[1]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)	Key Features
14"	FHD (1920x1080)	None	IPS	300 nits	Anti-glare	16:9	700:1	45% NTSC	85°/85°/-/-	DC dimming
14"	FHD (1920x1080)	None	IPS	400 nits	Anti-glare	16:9	800:1	72% NTSC	85°/85°/-/-	Low power
14"	FHD (1920x1080)	Multi-touch	IPS	300 nits	Anti-glare	16:9	700:1	45% NTSC	85°/85°/-/-	DC dimming
14"	FHD (1920x1080)	Multi-touch	IPS	500 nits	Anti-glare	16:9	1000:1	72% NTSC	85°/85°/-/-	ThinkPad® Privacy Guard, DC dimming
14"	UHD (3840x2160)	None	IPS	500 nits	Anti-glare	16:9	1500:1	100% DCI-P3	85°/85°/-/-	Dolby Vision™, DisplayHDR™ 400, DC dimming, X-Rite® FCC

Color Calibration

- X-Rite factory color calibration (UHD display)
- No color calibration

Touchscreen

- On-cell touch, supports 10-point touch
- Non-touch

Notes:

1. California Electronic Waste Recycling Fee
In California USA, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, please go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

Keyboard Backlight

- LED backlight
- Non-backlight

UltraNav™

TrackPoint® pointing device and Mylar® surface multi-touch touchpad

Mechanical

Dimensions (WxDxH)^[1]

329 x 227 x 17.9 mm (12.95 x 8.94 x 0.70 inches)

Weight^[2]

Models	Weight
FHD touch / FHD non-touch models	Starting at 1.55 kg (3.41 lbs)
FHD Low Power / FHD Privacy Guard / UHD models	Starting at 1.46 kg (3.23 lbs)

Case Color**

- Black
- Storm grey

Case Material**

ThinkPad P14s Gen 2 (AMD)

- PPS / 50% GF (top), PC-ABS / Talc15 + magnesium alloy (keyboard cover), PA / 50% GF (bottom)
- Aluminium (top), PC-ABS / Talc15 + magnesium alloy (keyboard cover), PA / 50% GF (bottom)

Notes:

1. The system dimensions may vary depending on configurations.
2. The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

Ethernet

Gigabit Ethernet, Realtek RTL8111H, supports Wake-on-LAN

WLAN + Bluetooth[®]*^[1]

- Wi-Fi[®] 6, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1
- Mediatek Wi-Fi 6 MT7921, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1
- Realtek Wi-Fi 6 RTL8852AE, 802.11ax Dual Band 2x2 Wi-Fi + Bluetooth 5.1
- Intel Wi-Fi 6 AX200, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1
- Qualcomm[®] Wi-Fi 6E QCNFA765, 802.11ax Dual Band 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card

WWAN**

- Wireless WAN upgradable to 4G (with antenna ready)
- Quectel EM120R-GL, 4G LTE CAT12, M.2 card
- Quectel EM120R-GL, 4G LTE CAT12, M.2 card, with embedded eSIM functionality
- No support

SIM Card

- Gemalto eSIM card (physical)
- No SIM card inbox

NFC

- Near Field Communication
- No support

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.

Ports^[1]

Standard Ports

- 2x USB 3.2 Gen 1 (one Always On)
- 2x USB-C 3.2 Gen 1 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x HDMI 2.0
- 1x microSD card reader
- 1x Ethernet (RJ-45)
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Side docking connector

Optional Ports***

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB4[®] 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
USB4 40Gbps (USB 40Gbps): 40 Gbit/s;
Thunderbolt™ 3/4: 40 Gbit/s

Docking

Docking

Various docking solutions supported via side docking connector, Thunderbolt or USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad P14s Gen 2 \(AMD\)](#)

Monitor Cable

Monitor Cable***

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to VGA Adapter
- Lenovo USB-C to DisplayPort Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Security Slot™, 3 x 7 mm

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader

- Touch style fingerprint reader on palm rest, match-on-chip
- No fingerprint reader

BIOS Security

- Power-on password
- Supervisor password
- NVMe password
- Self-healing BIOS

Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello
- (Optional) Privacy Guard with Privacy Alert

MANAGEABILITY

System Management

System Management

AMD Pro Manageability

SERVICE

Warranty^[1]

Base Warranty**

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

Notes:

1. The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping packaging: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 2438 m (8,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications^[1]

Green Certifications^[2]

- EPEAT™ Gold Registered
- ENERGY STAR® 8.0
- RoHS compliant

Notes:

1. The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.
2. EPEAT is registered where applicable, please see <https://www.epeat.net> for registration status by country.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

ISV Certifications

ISV Certifications

Please visit www.thinkworkstations.com/isv-certifications/

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

