OVERVIEW

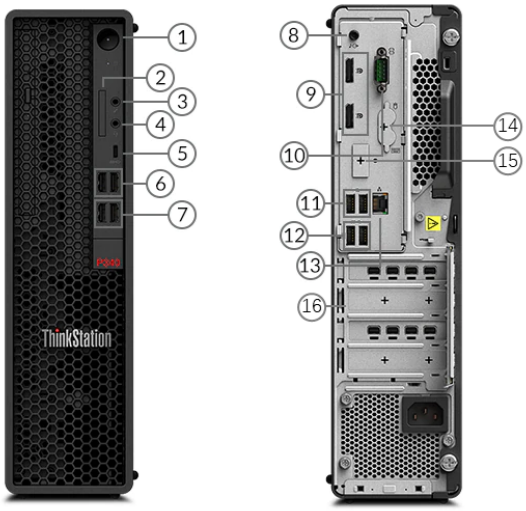

1. Power button	9. 2x DisplayPort
2. Card reader *	10. Serial
3. Microphone (3.5mm)	11. 2x USB 2.0
4. Headphone / microphone combo jack (3.5mm)	12. 2x USB 3.2 Gen 1
5. USB-C 3.2 Gen 1	13. Ethernet (RJ-45)
6. 2x USB 3.2 Gen 1	14. 2x PS/2 ports (keyboard / mouse) *
7. 2x USB 3.2 Gen 2	15. Video port (DisplayPort, HDMI, or USB-C) *
8. Line-out (3.5mm)	16. Optional ports on expansion cards *

Notes:
- Ports with * are only available on selected models

PERFORMANCE

Processor

Processor Family

Up to one Intel® Core™ i3 / i5 / i7 / i9 or Intel Xeon® Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i3-10100	4	8	3.6GHz	4.3GHz	6MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10300	4	8	3.7GHz	4.4GHz	8MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10320	4	8	3.8GHz	4.6GHz	8MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10400	6	12	2.9GHz	4.3GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10500	6	12	3.1GHz	4.5GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10600	6	12	3.3GHz	4.8GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i7-10700	8	16	2.9GHz	4.8GHz	16MB	DDR4-2933	Intel UHD Graphics 630
Core i9-10900	10	20	2.8GHz	5.2GHz	20MB	DDR4-2933	Intel UHD Graphics 630
Xeon W-1250	6	12	3.3GHz	4.7GHz	12MB	DDR4-2666	Intel UHD Graphics P630
Xeon W-1270	8	16	3.4GHz	5.0GHz	16MB	DDR4-2933	Intel UHD Graphics P630
Xeon W-1290	10	20	3.2GHz	5.2GHz	20MB	DDR4-2933	Intel UHD Graphics P630

Processor Sockets

1x FCLGA1200

Operating System

Operating System**

- Windows® 11 Pro
- Windows 11 Pro for Workstations
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 DG Windows 10 Pro 64
- Windows 11 DG Windows 10 Pro 64 for Workstations
- Windows 10 Pro 64
- Windows 10 Pro 64 for Workstations
- Windows 10 Home 64
- Windows 10 Home 64 Single Language
- Ubuntu Linux LTS
- Red Hat Enterprise Linux 8.5 (certified only, for detailed and latest information, please visit Red Hat Certified Hardware)
- No operating system

Graphics

Integrated Graphics**

- Intel UHD Graphics 630
- Intel UHD Graphics P630

Discrete Graphics Support

Supports up to one NVIDIA® T1000 or two NVIDIA T600

Discrete Graphics Offering***

Graphics	Memory	Power	Connector	SLI / NVlink
Quadro® P400	2GB GDDR5	30W	3x miniDP 1.4	None
Quadro P620	2GB GDDR5	40W	4x miniDP 1.4	None
Quadro P1000	4GB GDDR5	50W	4x miniDP 1.4	None
NVIDIA T400	2GB GDDR6	40W	3x miniDP 1.4	None

NVIDIA T400 4GB	4GB GDDR6	40W	3x miniDP 1.4	None
NVIDIA T600	4GB GDDR6	40W	4x miniDP 1.4	None
NVIDIA T1000	4GB GDDR6	50W	4x miniDP 1.4	None
NVIDIA T1000 8GB	8GB GDDR6	50W	4x miniDP 1.4	None

Monitor Support

Monitor Support

Supports multiple displays via onboard video ports and discrete graphics, the number of maximum monitors supported depends on the graphic card in use

Chipset

Chipset

Intel W480 chipset

Memory

Max Memory[1]

Up to 128GB DDR4-2933

Memory Type**

- DDR4-2933 UDIMM ECC
- DDR4-2933 UDIMM non-ECC

Memory Slots

Four DDR4 UDIMM slots, dual-channel capable

Memory Protection

ECC on models with ECC DIMMs and Xeon processor

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support[1]

Up to 1x 3.5″ SATA HDD / 2x 2.5″ SATA HDD / SSD + 4x M.2 PCIe® SSD
• 3.5″ HDD up to 4TB
• 2.5″ SATA HDD up to 1TB each
• 2.5″ SATA SSD up to 1TB each
• M.2 SSD up to 2TB each
• Optional Intel Optane™ Memory

Storage Type***

Disk Type	Interface	RPM	Offering
2.5″ SATA SSD	SATA 6Gb/s	-	512GB / 1TB
2.5″ SATA HDD	SATA 6Gb/s	7.2K	1TB FIPS
3.5″ SATA HDD	SATA 6Gb/s	7.2K	1TB / 2TB / 4TB
M.2 PCIe SSD	PCIe NVMe®	-	256GB / 512GB / 1TB / 2TB

Storage Controllers

Storage Controller	Type	Interface	RAID	Cache
Onboard Intel RST SATA RAID	Standard	SATA 6.0Gb/s	0/1	None
Onboard Intel RST PCIe RAID	Standard	PCIe NVMe	0/1	None

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.

Removable Storage

Optical Support

Optional one 9.0mm optical drive, DVD-ROM, DVD±RW, and Blu-ray

Card Reader

- SD card reader
- No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC623 codec

Speakers

Single speaker

Power Supply

Power Supply**

Power	Type	Efficiency	Key Features
310W	Fixed	92%	Autosensing, 80 PLUS Platinum qualified
380W	Fixed	92%	Autosensing, 80 PLUS Platinum qualified

DESIGN

Mechanical

Form Factor

Mini-tower (8.2L)

Dimensions (WxDxH)

92.5 x 309.7 x 339.5 mm (3.6 x 9.3 x 13.4 inches)

Weight

5.65 kg (12.46 lbs, maximum configuration)

Bays

- 1x 2.5″ disk bay (optional, comes with disk or Storage Bay Upgrade Kit)
- 1x 3.5″ disk bay (optional, comes with disk or Storage Bay Upgrade Kit)

M.2 Slots

Up to 4x M.2 SSD:
• 2 via onboard slots
• 2 via Single M.2 to PCIe adapter

Expansion Slots

- One PCIe 3.0 x16
- One PCIe 3.0 x1
- One PCIe 3.0 x16 (x4 lanes)

Expansion Slots Offering

Slot 1: PCIe 3.0 x16, low profile, links to CPU
Slot 2: PCIe 3.0 x1, low profile, links to PCH
Slot 3: PCIe 3.0 x16 (negotiable link width x4), low profile, links to PCH

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, Intel Ethernet Connection I219-LM, 1x RJ-45, supports Wake-on-LAN

Optional Ethernet

Two additional Ethernet adapters support, up to two additional 10 GbE ports
• Gigabit Ethernet, Intel I210-T1, 1x RJ-45, PCIe x1
• Gigabit Ethernet, Intel I350-T2, 2x RJ-45, PCIe x4

- Gigabit Ethernet, Intel I350-T4, 4x RJ-45, PCIe x4
- Gigabit Ethernet, Bitland BN8E88, 1x RJ-45, PCIe x1
- 10 Gigabit Ethernet, Marvell AQtion AQN-107, 1x RJ-45, PCIe x4

WLAN + Bluetooth®[1]

- Intel Wi-Fi® 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card
- No WLAN and Bluetooth

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation

Ports[1]

Front Ports

- 2x USB 3.2 Gen 1
- 2x USB 3.2 Gen 2
- 1x USB-C® 3.2 Gen 1
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

Rear Ports[2]

- 2x USB 2.0
- 2x USB 3.2 Gen 1
- 2x DisplayPort™
- 1x serial (9-pin)
- 1x Ethernet (RJ-45)
- 1x line-out (3.5mm)

Optional Rear Ports***

- 2x USB 2.0
- 2x USB 3.2 Gen 1 (via 2-port USB expansion card, PCIe x1)
- 2x USB-C 3.2 Gen 2 (via 2-port USB-C expansion card)
- 1x Thunderbolt™ 3
- 1x video (DisplayPort, HDMI®, or USB-C)
- 1x serial
- 4x serial (via 4-port serial expansion card, PCIe x1)
- 1x parallel
- 2x PS/2

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
   USB 2.0: 480 Mbit/s;
   USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
   USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
   USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
   Thunderbolt 3/4: 40 Gbit/s;
2. For video ports on discrete graphics, please see graphics section

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

- (Optional) Cable lock
- (Optional) E-lock
- Kensington® Security Slot™, 3 x 7 mm

Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

BIOS Security

- Administrator password

- Power-on password

MANAGEABILITY

System Management

System Management[**][1][2]

- Intel vPro® with Intel AMT 14 on wired LAN
- Intel vPro with Intel AMT 14
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.
2. Intel vPro offers a superset of DASH's defined capabilities.

Diagnostic

Diagnostic

Lenovo UEFI Bootable Diagnostics

SERVICE

Warranty[1]

Base Warranty

3-year limited onsite service

Notes:

1. The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to https://smartfind.lenovo.com/. To learn more details of warranty policy, please access https://pcsupport.lenovo.com/warranty.

ENVIRONMENTAL

Operating Environment

Temperature

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

CERTIFICATIONS

Green Certifications

Green Certifications

- (Optional) EPEAT™ Gold
- (Optional) EPEAT Silver
- ENERGY STAR® 8.0
- RoHS compliant

ISV Certifications

ISV Certifications

Please visit www.thinkworkstations.com/isv-certifications/
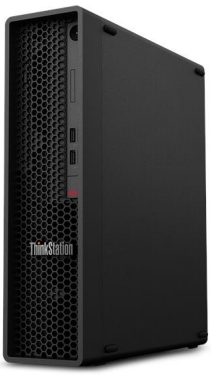
- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.