


**OVERVIEW**

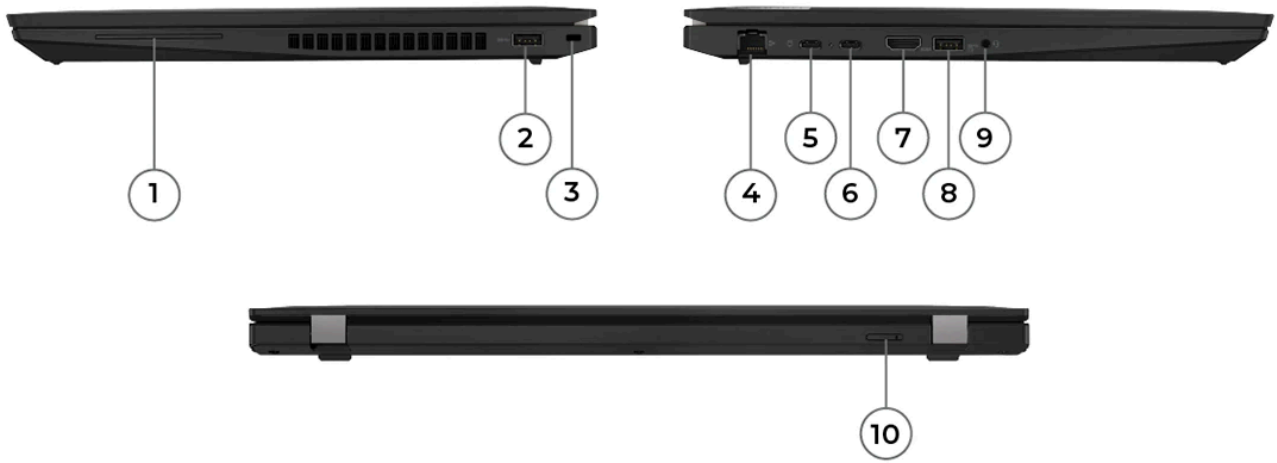

1. Smart card reader *	6. USB-C 3.2 Gen 2
2. USB 3.2 Gen 1	7. HDMI
3. Kensington Nano Security Slot	8. USB 3.2 Gen 1 (Always On)
4. Ethernet (RJ-45)	9. Headphone / microphone combo jack (3.5mm)
5. USB-C 3.2 Gen 2	10. Nano-SIM card slot *

Notes:

- Items with \* are only available on selected models

## PERFORMANCE

### Processor

#### Processor Family

AMD Ryzen™ 5 / 7 Processor

#### Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
AMD Ryzen 5 PRO 6650U	6	12	2.9GHz	4.5GHz	3MB L2 / 16MB L3	AMD Radeon™ 660M Graphics
AMD Ryzen 7 PRO 6850U	8	16	2.7GHz	4.7GHz	4MB L2 / 16MB L3	AMD Radeon 680M Graphics

### Operating System

#### Operating System\*\*<sup>[1]</sup>

- Windows® 11 Pro
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 DG Windows 10 Pro 64
- Linux
- Ubuntu Linux
- No operating system

#### Notes:

1. Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

### Graphics

#### Graphics\*\*

Graphics	Type	Memory	Key Features
AMD Radeon 660M	Integrated	Shared	DirectX® 12
AMD Radeon 680M	Integrated	Shared	DirectX 12

### Monitor Support

#### Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and USB-C®)

- HDMI supports up to 4K@60Hz
- USB-C supports up to 4K@60Hz (4 displays output), 5K@60Hz (3 displays output) or 5K@120Hz (up to 2 displays output)

### Chipset

#### Chipset

AMD SoC (System on Chip) platform

### Memory

#### Max Memory

- 8GB soldered memory, not upgradable
- 16GB soldered memory, not upgradable
- 32GB soldered memory, not upgradable

#### Memory Slots

Memory soldered to systemboard, no slots, dual-channel

#### Memory Type

LPDDR5-6400

### Storage

#### Storage Support<sup>[1]</sup>

One drive, up to 2TB M.2 2280 SSD

#### Storage Slot

One M.2 2280 PCIe® 4.0 x4 slot

#### Storage Type\*\*

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe NVMe®, PCIe 4.0 x4	256GB / 512GB / 1TB	Opal 2.0
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4 Performance	512GB / 1TB / 2TB	Opal 2.0

#### Notes:

1. The storage capacity supported is based on the test results with current Lenovo® storage offerings. The system may support larger storage as the technology develops.

## Removable Storage

#### Card Reader

No card reader

## Multi-Media

#### Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

#### Speakers

Stereo speakers, 2W x2, Dolby® Audio™

#### Microphone<sup>[1]</sup>

- Dual-microphone array, far-field, Dolby Voice
- No microphone

#### Camera\*\*

- HD 720p, with privacy shutter, fixed focus
- FHD 1080p, with privacy shutter, fixed focus
- FHD 1080p + IR hybrid, with privacy shutter, fixed focus
- No camera

#### Notes:

1. No microphone is for special bid only.

## Battery

#### Battery\*\*

- Integrated Li-Polymer 52.5Wh battery, supports Rapid Charge (charge up to 80% in 1hr)
- Integrated Li-Polymer 86Wh battery

#### Battery Life<sup>[1]</sup>

Configuration 1 (max battery life)

MobileMark® 2018: up to 24.4 hr with 629 performance score @200nits

MobileMark 25: up to 23.2 hr with 532 performance score @250nits

JEITA 2.0: up to 35.0 hr @150nits

Local video playback: up to 29.7 hr @150nits

Alternate configuration 2

MobileMark 2018: up to 11.1 hr with 795 performance score @200nits

MobileMark 25: up to 11.4 hr with 535 performance score @250nits

JEITA 2.0: up to 18.3 hr @150nits

Local video playback: up to 16.2 hr @150nits

Alternate configuration 3

MobileMark 2018: up to 12.1 hr with 687 performance score @200nits

MobileMark 25: up to 11.3 hr with 542 performance score @250nits

JEITA 2.0: up to 15.5 hr @150nits

Local video playback: up to 14.0 hr @150nits

#### Notes:

1. Configuration 1 (max battery life): WUXGA Low Power (non-touch), AMD Ryzen 7 PRO 6850U, 16GB LPDDR5, Win 10, 86Wh battery,

best power efficiency power mode

Alternate configuration 2: WUXGA (touch), AMD Ryzen 5 PRO 6650U, 16GB LPDDR5, Win 10, 52.5Wh battery, best power efficiency power mode

Alternate configuration 3: WQXGA (non-touch), AMD Ryzen 5 PRO 6650U, 32GB LPDDR5, Win 10, 52.5Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark 2018](#), [MobileMark 25](#), JEITA 2.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.

Actual battery life will vary and depends on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.

The maximum capacity of the battery will decrease with time, ambient temperature and use.

Refer to [Microsoft\\* link](#) for more information about the Windows Performance power slider.

## Power Adapter

### Power Adapter\*\*<sup>[1][2]</sup>

- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 100W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter

Notes:

1. AC adapter offerings depend on the country.
2. No power adapter is for special bid only.

## DESIGN

### Display

#### Display\*\*<sup>[1]</sup>

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)	Key Features
16"	WUXGA (1920x1200)	None	IPS	300 nits	Anti-glare	16:10	800:1	45% NTSC	85°/85°/85°/85°	-
16"	WUXGA (1920x1200)	None	IPS	400 nits	Anti-glare	16:10	1000:1	100% sRGB	85°/85°/85°/85°	Low power, Eyesafe® Certified
16"	WUXGA (1920x1200)	Multi-Touch	IPS	300 nits	Anti-glare	16:10	800:1	45% NTSC	85°/85°/85°/85°	-
16"	WUXGA (1920x1200)	Multi-touch	IPS	500 nits	Anti-glare	16:10	1000:1	100% sRGB	85°/85°/85°/85°	ThinkPad® Privacy Guard
16"	WQXGA (2560x1600)	None	IPS	400 nits	Anti-glare	16:10	1200:1	100% sRGB	85°/85°/85°/85°	Dolby Vision™, TÜV Rheinland® Low Blue Light

#### Touchscreen

- On-cell touch, supports 10-point touch
- Non-touch

Notes:

1. California Electronic Waste Recycling Fee  
In California USA, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, please go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

## Input Device

### Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls, numeric keypad

#### Keyboard Backlight

- LED backlight
- Non-backlight

**UltraNav™**

TrackPoint® pointing device and glass-like Mylar® surface multi-touch touchpad, 67.7 x 115 mm (2.67 x 4.53 inches)

**Mechanical****Dimensions (WxDxH)<sup>[1]</sup>**

361.9 x 255.5 x 20.5 mm (14.25 x 10.06 x 0.81 inches)

**Weight<sup>[2]</sup>**

Models	Weight
Models with storm grey cover	Starting at 1.738 kg (3.83 lbs)
Models with thunder black cover	Starting at 1.810 kg (3.99 lbs)

**Case Color\*\***

- Storm grey
- Thunder black

**Case Material\*\***

- Thunder black models: PC + 20% CF + 50% GF (top), PPS (bottom)
- Storm grey models: aluminium (top), PPS (bottom)

**Notes:**

1. The system dimensions may vary depending on configurations.
2. The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

**CONNECTIVITY****Network****Ethernet\*\***

- Gigabit Ethernet, Realtek RTL8111EPV (DASH models), 1x RJ-45, supports Wake-on-LAN
- Gigabit Ethernet, Realtek RTL8111HN (non-DASH models), 1x RJ-45, supports Wake-on-LAN

**WLAN + Bluetooth®\*\*<sup>[1][2]</sup>**

- AMD Wi-Fi® 6E RZ616, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1
- Qualcomm® Wi-Fi 6E NFA725A, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1

**WWAN\*\***

- Wireless WAN upgradable to 4G (with antenna ready)
- Fibocom L860-GL-16, 4G LTE CAT16, M.2 card
- Quectel EM05-G, 4G LTE CAT4, M.2 card
- No support

**SIM Card**

- Gemalto eSIM card (physical)
- No SIM card inbox

**NFC**

- Near Field Communication
- No support

**Notes:**

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.
2. Wi-Fi 6E full features might be limited by country level restrictions.  
Wi-Fi 6E only enabled on Windows 11 and operates as Wi-Fi 6 with Windows 10.  
6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.

**Ports<sup>[1]</sup>****Standard Ports**

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x USB-C 3.2 Gen 2 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4a)
- 1x HDMI, up to 4K/60Hz

# ThinkPad T16 Gen 1 (AMD)

- 1x Ethernet (RJ-45)
- 1x Headphone / microphone combo jack (3.5mm)

## Optional Ports\*\*\*

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

## Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.  
USB 2.0: 480 Mbit/s;  
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;  
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
USB4 40Gbps (USB 40Gbps): 40 Gbit/s;  
Thunderbolt™ 3/4: 40 Gbit/s

## Docking

### Docking

Various docking solutions supported via USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad T16 Gen 1 \(AMD\)](#)

## Monitor Cable

### Monitor Cable\*\*\*

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to VGA Adapter
- Lenovo USB-C to DisplayPort Adapter
- No monitor cable

## SECURITY & PRIVACY

## Security

### Security Chip\*\*

- Discrete TPM 2.0, TCG certified, with Microsoft Pluton TPM 2.0 integrated in SoC
- Microsoft Pluton TPM 2.0 integrated in SoC

### Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

### Smart Card Reader

- Smart card reader
- No smart card reader

### Fingerprint Reader<sup>[1]</sup>

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

### BIOS Security

- Power-on password
- Supervisor password
- System management password
- NVMe password
- FIDO (Fast Identity Online) authentication
- Certificate based BIOS authentication
- Self-healing BIOS

### Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello
- (Optional) Privacy Guard with Privacy Alert
- Glance by Mirametrix®

## Notes:

1. Fingerprint reader is standard on storm grey models and optional on thunder black models.

## MANAGEABILITY

### System Management

#### System Management

- DASH
- Non-DASH

## SERVICE

### Warranty<sup>[1]</sup>

#### Base Warranty<sup>\*\*[2]</sup>

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

#### Notes:

1. The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.
2. No base warranty is for special bid only.

## ENVIRONMENTAL

### Sustainability

#### Material

97% PCC recycled plastic used in speaker enclosure  
97% PCC recycled plastic used in the 52.5Wh battery  
25-30% PCC recycled plastic used in the 86Wh battery  
95% PCC recycled plastic used in standard 65W adapter  
Low-temperature solder  
90% recycled and/or sustainable packaging

### Operating Environment

#### Temperature<sup>[1]</sup>

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

#### Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

#### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

#### Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

## ACCESSORIES

### Bundled Accessories

#### Bundled Accessories

- Lenovo USB-C to Ethernet Adapter
- None

## CERTIFICATIONS

## Green Certifications<sup>[1]</sup>

### Green Certifications<sup>[2]</sup>

- EPEAT™ Gold Registered
- ENERGY STAR® 8.0
- ErP Lot 3
- TCO Certified 9.0
- RoHS compliant

#### Notes:

1. The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.
2. EPEAT is registered where applicable, please see <https://www.epeat.net> for registration status by country.

## Other Certifications

### Mil-Spec Test

MIL-STD-810H military test passed

### Other Certifications

- (Optional) Eyesafe Certified
- (Optional) TÜV Rheinland Low Blue Light

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. **LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.





AMD



AMD



AMD



AMD



AMD



AMD