


OVERVIEW

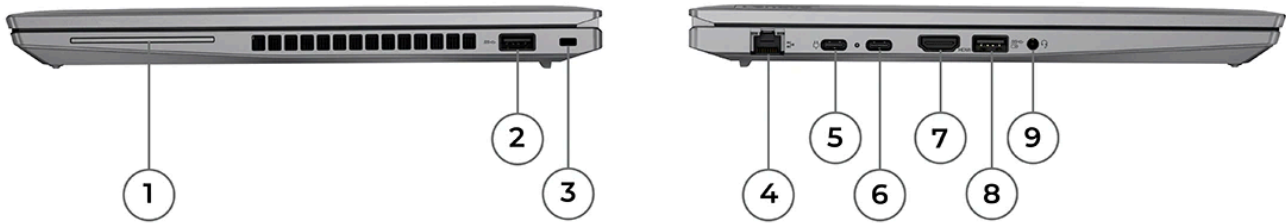

1. Smart card reader *	6. USB-C 3.2 Gen 2
2. USB 3.2 Gen 1	7. HDMI
3. Kensington Nano Security Slot	8. USB 3.2 Gen 1 (Always On)
4. Ethernet (RJ-45)	9. Headphone / microphone combo jack (3.5mm)
5. USB-C 3.2 Gen 2	

Notes:

- Items with * are only available on selected models
- Optional nano-SIM card slot on the rear side (not shown on the sample product above)

PERFORMANCE

Processor

Processor Family

AMD Ryzen™ 5 / 7 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
AMD Ryzen 5 PRO 6650U	6	12	2.9GHz	4.5GHz	3MB L2 / 16MB L3	LPDDR5-6400	AMD Radeon™ 660M Graphics
AMD Ryzen 7 PRO 6850U	8	16	2.7GHz	4.7GHz	4MB L2 / 16MB L3	LPDDR5-6400	AMD Radeon 680M Graphics

Operating System

Operating System**^[1]

- Windows® 11 Pro
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 DG Windows 10 Pro 64
- Linux
- Ubuntu Linux
- No operating system

Notes:

1. Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

Graphics

Graphics**

Graphics	Type	Memory	Key Features
AMD Radeon 660M	Integrated	Shared	DirectX® 12
AMD Radeon 680M	Integrated	Shared	DirectX 12

Monitor Support

Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and USB-C®)

- HDMI supports up to 4K@60Hz
- USB-C supports up to 4K@60Hz (4 displays output), 5K@60Hz (3 displays output) or 5K@120Hz (up to 2 displays output)

Chipset

Chipset

AMD SoC (System on Chip) platform

Memory

Max Memory^[1]

- 8GB soldered memory, not upgradable
- 16GB soldered memory, not upgradable
- 32GB soldered memory, not upgradable

Memory Slots

Memory soldered to systemboard, no slots, dual-channel

Memory Type

LPDDR5-6400

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the

ThinkPad T14 Gen 3 (AMD)

technology develops.

Storage

Storage Support^[1]

One drive, up to 2TB M.2 2280 SSD

Storage Slot

One M.2 2280 PCIe[®] 4.0 x4 slot

Storage Type**

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe NVMe [®] , PCIe 4.0 x4	256GB / 512GB / 1TB	Opal 2.0
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4 Performance	512GB / 1TB / 2TB	Opal 2.0

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.

Removable Storage

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek[®] ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby[®] Audio™

Microphone^[1]

- Dual-microphone array, far-field, Dolby Voice
- No microphone

Camera**

- HD 720p, with privacy shutter, fixed focus
- FHD 1080p, with privacy shutter, fixed focus
- FHD 1080p + IR hybrid, with privacy shutter, fixed focus
- No camera

Notes:

1. No microphone is for special bid only.

Battery

Battery**

- Integrated Li-Polymer 39.3Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter
- Integrated Li-Polymer 52.5Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Battery Life^[1]

Configuration 1 (max battery life)

MobileMark[®] 2018: up to 14.6 hr with 595 performance score @200nits

MobileMark 25: up to 13.5 hr with 513 performance score @250nits

JEITA 2.0: up to 21.1 hr @150nits

Local video playback: up to 18.1 hr @150nits

Alternate configuration 2

MobileMark 2018: up to 13.3 hr with 694 performance score @200nits

MobileMark 25: up to 12.6 hr with 548 performance score @250nits

JEITA 2.0: up to 16.5 hr @150nits

Local video playback: up to 14.8 hr @150nits

Alternate configuration 3

MobileMark 2018: up to 10.1 hr with 662 performance score @200nits

MobileMark 25: up to 6.0 hr with 541 performance score @250nits

JEITA 2.0: up to 13.2 hr @150nits
Local video playback: up to 10.4 hr @150nits

Notes:

- Configuration 1 (max battery life): WUXGA Low Power (non-touch), AMD Ryzen 7 PRO 6850U, 16GB LPDDR5, Win 11, 52.5Wh battery, best power efficiency power mode
Alternate configuration 2: WUXGA 300nits (touch), AMD Ryzen 5 PRO 6650U, 16GB LPDDR5, Win 11, 52.5Wh battery, best power efficiency power mode
Alternate configuration 3: WQUXGA (touch), AMD Ryzen 5 PRO 6650U, 32GB LPDDR5, Win 11, 52.5Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark 2018](#), [MobileMark 25](#), JEITA 2.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.

Actual battery life will vary and depends on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.

The maximum capacity of the battery will decrease with time, ambient temperature and use.

Refer to [Microsoft® link](#) for more information about the Windows Performance power slider.

Power Adapter

Power Adapter**^{[1][2]}

- 45W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter

Notes:

- AC adapter offerings depend on the country.
- No power adapter is for special bid only.

DESIGN

Display

Display**^[1]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)	Key Features
14"	2.2K (2240x1400)	None	IPS	300 nits	Anti-glare	16:10	1500:1	100% sRGB	85°/85°/85°/85°	TÜV Low Blue Light
14"	WUXGA (1920x1200)	None	IPS	300 nits	Anti-glare	16:10	700:1	45% NTSC	85°/85°/85°/85°	-
14"	WUXGA (1920x1200)	None	IPS	400 nits	Anti-glare	16:10	800:1	100% sRGB	85°/85°/85°/85°	Low power, Eyesafe® Certified
14"	WUXGA (1920x1200)	On-cell touch	IPS	300 nits	Anti-glare	16:10	700:1	45% NTSC	85°/85°/85°/85°	-
14"	WUXGA (1920x1200)	On-cell touch	IPS	500 nits	Anti-glare	16:10	1000:1	100% sRGB	85°/85°/85°/85°	ThinkPad® Privacy Guard
14"	WQUXGA (3840x2400)	Add On Film Touch	IPS	500 nits	Anti-glare, Anti-reflection, Anti-smudge	16:10	1500:1	100% DCI-P3	85°/85°/85°/85°	Dolby Vision™, DisplayHDR™ 400, Eyesafe Certified

Touchscreen**

- Add-on Film Touch, supports 10-point touch
- On-cell touch, supports 10-point touch

- Non-touch

Notes:

1. California Electronic Waste Recycling Fee

In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

Keyboard Backlight

- LED backlight
- Non-backlight

UltraNav™

TrackPoint® pointing device and glass-like Mylar® surface multi-touch touchpad, 61 x 115 mm (2.40 x 4.53 inches)

Mechanical

Dimensions (WxDxH)^[1]

Models	Dimensions
Models with storm grey cover	317.7 x 227.36 x 17.9 mm (12.51 x 8.95 x 0.70 inches)
Models with black cover	317.7 x 226.9 x 17.9 mm (12.51 x 8.93 x 0.70 inches)

Weight^[2]

Models	Weight
Models with storm grey cover and 52.5Wh battery	Starting at 1.540 kg (3.39 lbs)
Models with storm grey cover and 39.3Wh battery	Starting at 1.501 kg (3.31 lbs)
Models with thunder black cover and 39.3Wh battery	Starting at 1.406 kg (3.10 lbs)
Models with thunder black cover and 52.5Wh battery	Starting at 1.498 kg (3.30 lbs)

Case Color**

- Storm grey
- Thunder black

Surface Treatment

Not anti-microbial surface treatment

Case Material**

- Thunder black models: PC + 20% CF + 50% GF (top), PPS (bottom)
- Storm grey models: aluminium (top), PPS (bottom)

Notes:

1. The system dimensions may vary depending on configurations.

2. The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

Ethernet**

- Gigabit Ethernet, Realtek RTL8111HN (non-DASH models), 1x RJ-45, supports Wake-on-LAN
- Gigabit Ethernet, Realtek RTL8111EPV (DASH models), 1x RJ-45, supports Wake-on-LAN

WLAN + Bluetooth®**^{[1][2]}

- AMD Wi-Fi® 6E RZ616, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1
- Qualcomm® Wi-Fi 6E NFA725A, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1

WWAN**

- Wireless WAN upgradable to 4G (with antenna ready)
- Fibocom L860-GL-16, 4G LTE CAT16, M.2 card

ThinkPad T14 Gen 3 (AMD)

- Quectel EM05-G, 4G LTE CAT4, M.2 card
- No support

SIM Card

- Gemalto eSIM card (physical)
- No SIM card inbox

NFC

- Near Field Communication
- No support

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.
2. Wi-Fi 6E full features might be limited by country level restrictions.
Wi-Fi 6E only enabled on Windows 11 and operates as Wi-Fi 6 with Windows 10.
6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.

Ports^[1]

Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x USB-C 3.2 Gen 2 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4a)
- 1x HDMI, up to 4K/60Hz
- 1x Ethernet (RJ-45)
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports^{***}

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt™ 3/4: 40 Gbit/s

Docking

Docking

Various docking solutions supported via USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad T14 Gen 3 \(AMD\)](#)

Monitor Cable

Monitor Cable^{***}

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to VGA Adapter
- Lenovo USB-C to DisplayPort Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip^{**}

- Discrete TPM 2.0, TCG certified, with Microsoft Pluton TPM 2.0 integrated in SoC
- Microsoft Pluton TPM 2.0 integrated in SoC

Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

Smart Card Reader

- Smart card reader

- No smart card reader

Fingerprint Reader

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

BIOS Security

- Power-on password
- Supervisor password
- System management password
- NVMe password
- FIDO (Fast Identity Online) authentication
- Certificate based BIOS authentication
- Self-healing BIOS

Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello
- (Optional) Privacy Guard with Privacy Alert
- Glance by Mirametrix®

MANAGEABILITY

System Management

System Management

- DASH
- Non-DASH

SERVICE

Warranty

Base Warranty^[1]**

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

Notes:

1. No base warranty is for special bid only.

ENVIRONMENTAL

Sustainability

Material

97% PCC recycled plastic used in speaker enclosure
97% PCC recycled plastic used in the 52.5Wh battery
25-30% PCC recycled plastic used in the 39.3Wh battery
95% PCC recycled plastic used in standard 65W adapter
Low-temperature solder
90% recycled and/or sustainable packaging

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)

- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

ACCESSORIES

Bundled Accessories

Bundled Accessories

- Lenovo USB-C to Ethernet Adapter
- None

CERTIFICATIONS

Green Certifications^[1]

Green Certifications^[2]

- EPEAT™ Gold
- ENERGY STAR® 8.0
- ErP Lot 3
- TCO Certified 9.0
- RoHS compliant

Notes:

1. The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.
2. EPEAT is registered where applicable, please see <https://www.epeat.net> for registration status by country.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

Other Certifications

- (Optional) Eyesafe Certified
- (Optional) TÜV Rheinland® Low Blue Light

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



AMD



AMD



AMD



AMD



AMD



AMD